
VIBE WITH JUDEO · CASE FILES

THE EDMUND FITZGERALD

LAKE SUPERIOR · 10 NOV 1975 → 2026

CAUSE: "MOST PROBABLE" · STILL DISPUTED

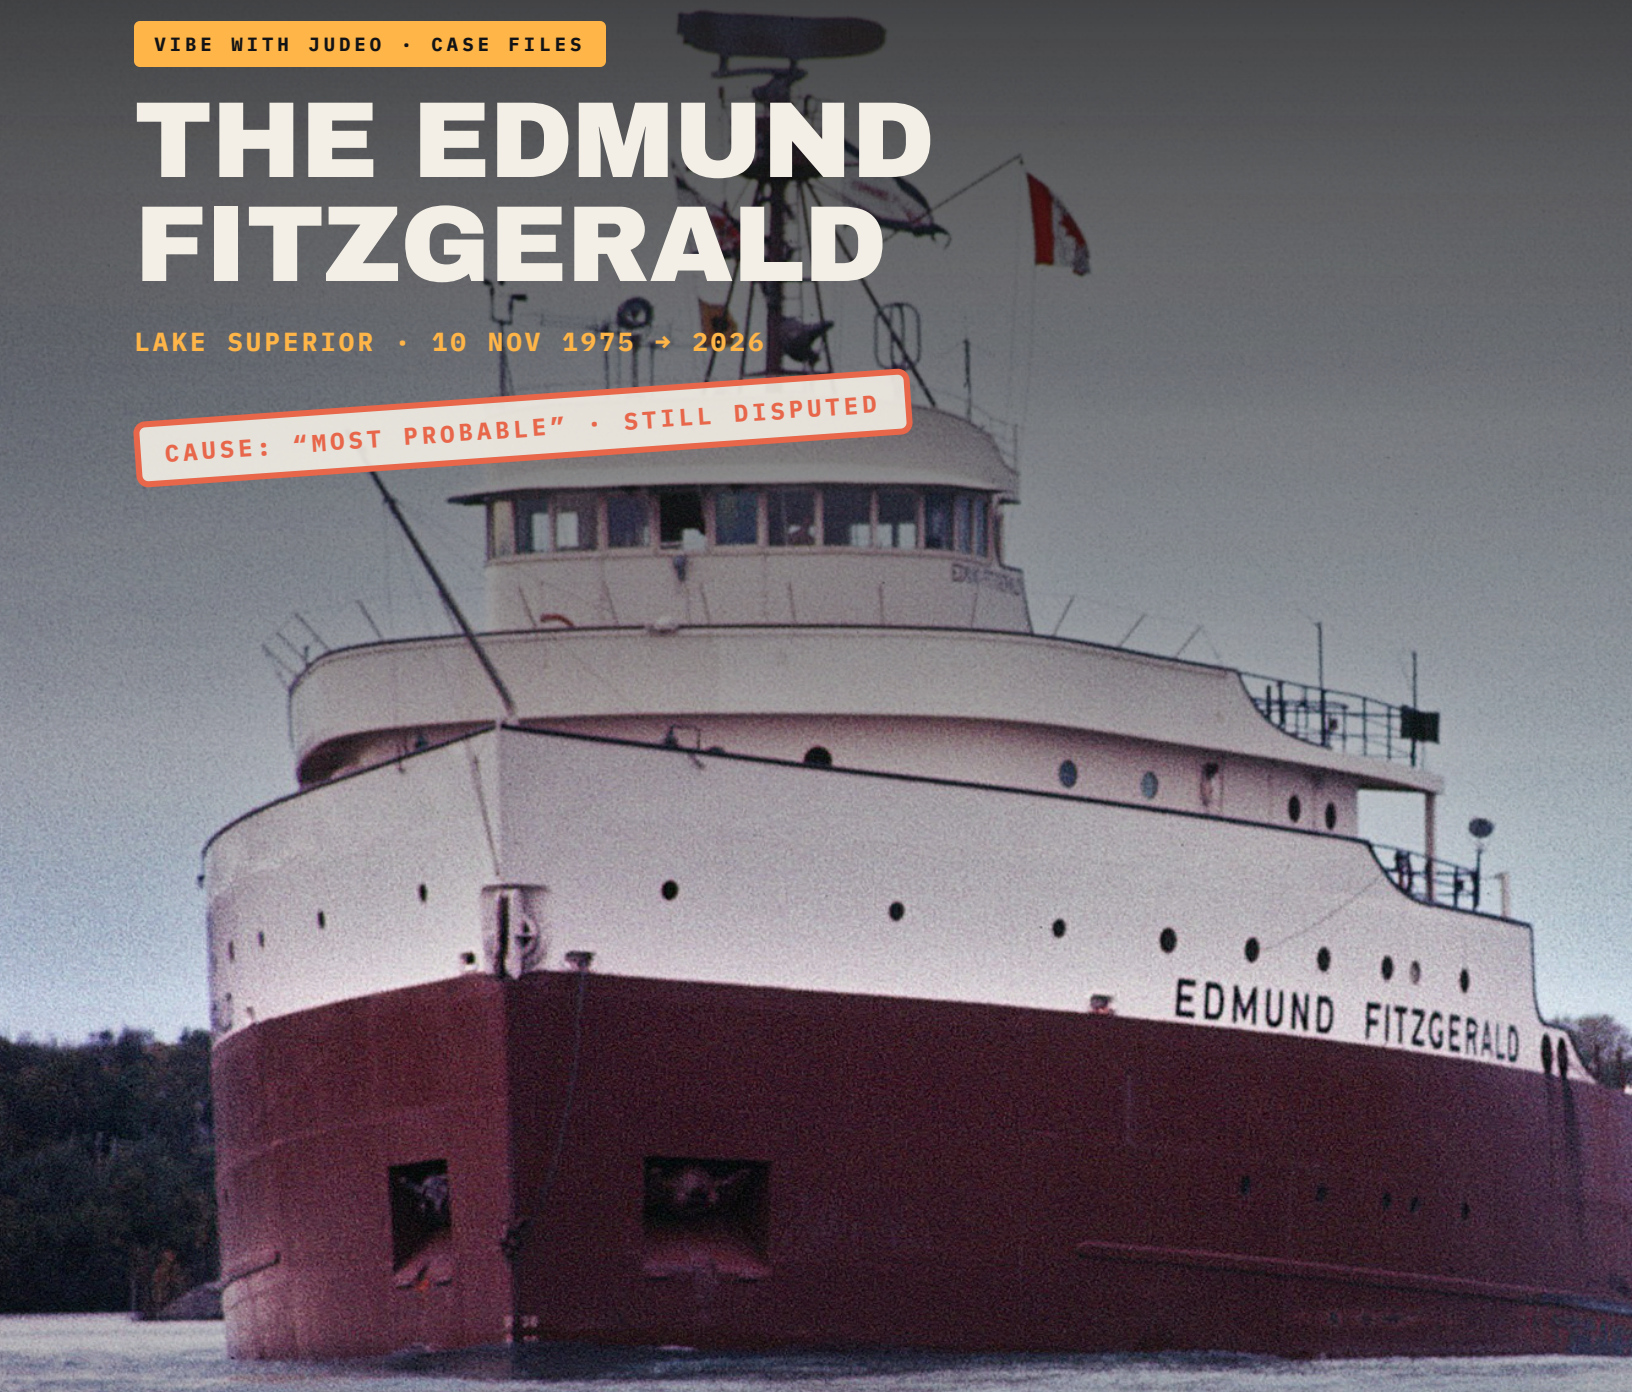

FREE FIELD EDITION · 12 PAGES
FACTS CHECKED TO 25 OCT 2026
KEY CLAIMS GRADED AND SOURCED

Cover: the Edmund Fitzgerald in 1971. Photo by Greenmars, Wikimedia Commons (restored version), licence CC BY-SA 3.0 (creativecommons.org/licenses/by-sa/3.0); cropped by us.

THE CASE IN 60 SECONDS

NO MAYDAY

On the evening of 10 November 1975 the ore carrier *Edmund Fitzgerald*, 729 feet long and loaded with 26,116 long tons of taconite pellets, disappeared from the radar of the ship following her through a Lake Superior storm. She sank about 17 miles from Whitefish Point, Michigan. No distress call was ever sent. All 29 men aboard were lost, and none was ever recovered. Two US investigations named a “most probable” and a “probable” cause, and they disagreed on how it happened. Half a century on, no theory is settled.

29
CREW LOST, 10 NOV 1975

530 ft
OF WATER, IN CANADIAN WATERS

0
DISTRESS CALLS RECEIVED

CASE CARD

ITEM	RECORD	GRADE
The ship	729 ft long, 75 ft wide, 13,632 gross tons. Built in 1958 by Great Lakes Engineering Works, River Rouge, Michigan (Hull No. 301); launched in June 1958	VERIFIED
Owner / operator	Owned by the Northwestern Mutual Life Insurance Company; run by the Columbia Transportation Division of Oglebay Norton, Cleveland	VERIFIED
Last voyage	Superior, Wisconsin → Detroit (the steel mills at Zug Island). Left in the early afternoon of 9 Nov 1975	VERIFIED
Master	Captain Ernest M. McSorley, 63	VERIFIED
Last words heard	“We are holding our own.” About 7:10 p.m., 10 Nov, to the *Arthur M. Anderson*. The Coast Guard writes “FITZGERALD replied” and does not name the speaker	VERIFIED
The wreck	530 ft down, about 17 statute miles from Whitefish Point, just north of the US–Canada boundary. Bow upright; stern upside down about 170 ft away	VERIFIED
Official cause	Coast Guard (1977): flooding through ineffective hatch closures. NTSB (1978, 3–1 vote): sudden collapse of one or more hatch covers. The dissent: a grounding on a shoal	CONFLICT


THE SHORT ANSWER (AS OF 25 OCT 2026)

Nobody knows for certain. The Coast Guard wrote that the “proximate cause … cannot be determined” and gave a “most probable” cause instead; the NTSB gave a “probable” one. Both agreed boarding seas flooded the hold. They disagreed about how the water got in, and one NTSB member and the shipowners' trade group blamed a shoal. Canada has approved no dive since the bell was raised in 1995, FOX 9 reports, and there has been no new survey.

How to read the grades. VERIFIED a primary record (the USCG and NTSB reports, Ontario law, an organiser on its own event) or several reputable sources agree. ATTRIBUTED one source, or a party with a stake; we say who. CONFLICT credible sources disagree; we show both. OUR CALCULATION our arithmetic from a cited input. Times are Eastern Standard Time; “miles” are statute miles, as in the Coast Guard report.

THE MAP

SUPERIOR TO WHITEFISH BAY

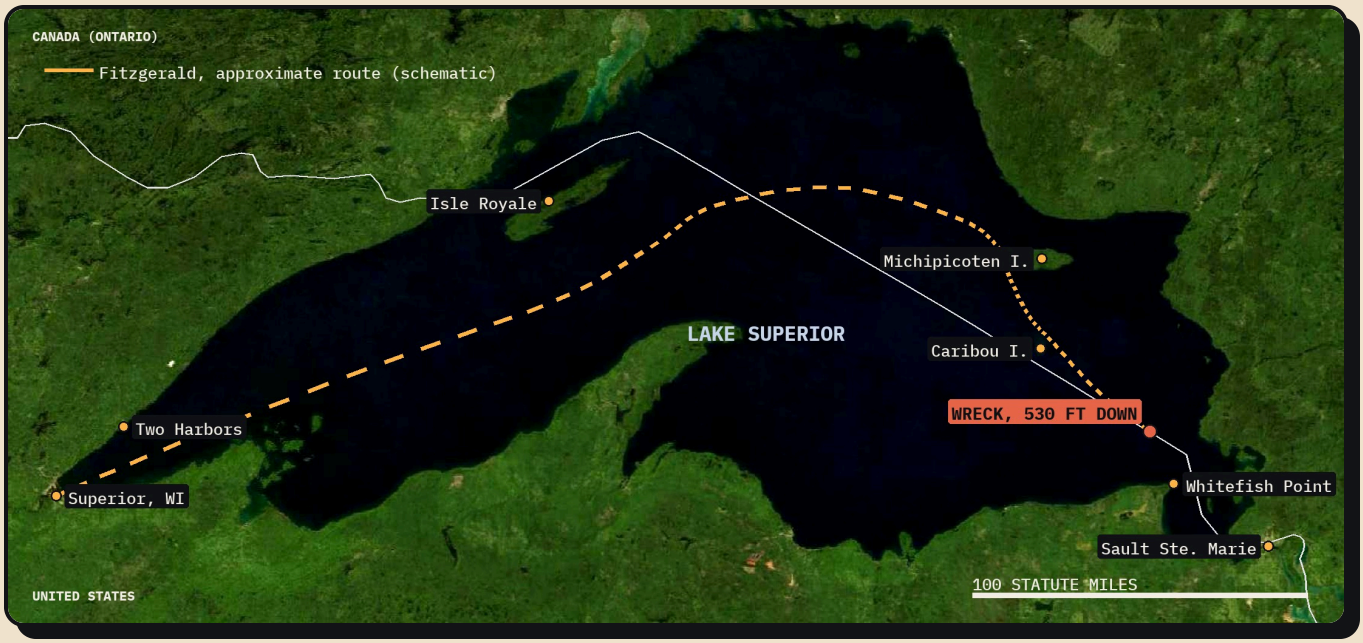

The last voyage. The route is approximate, drawn by us through the Coast Guard's reported positions: about 20 miles due south of Isle Royale at 1 a.m. on 10 Nov, about 35 miles north of Copper Harbor at 7 a.m., about 11 miles northwest of Michipicoten Island at 1 p.m. The captains had left the normal lanes for the lee of the Canadian shore; the Coast Guard said the exact tracks cannot be reconstructed. Basemap: NASA Blue Marble shaded relief and bathymetry via NASA GIBS (public domain); border: Natural Earth (public domain).

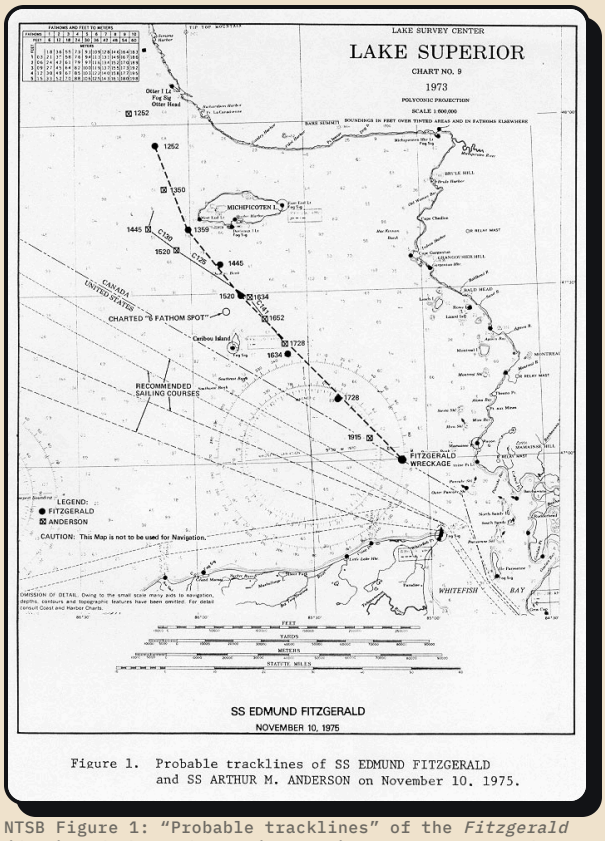


Figure 1. Probable tracklines of SS EDMUND FITZGERALD and SS ARTHUR M. ANDERSON on November 10. 1975.

NTSB Figure 1: "Probable tracklines" of the *Fitzgerald* (dots) and the *Anderson* (squares) on 10 Nov 1975, drawn on Lake Survey Chart No. 9. NTSB-MAR-78-3 (public domain).

Two ships. The *Arthur M. Anderson*, a U.S. Steel ore boat under Captain Jesse "Bernie" Cooper, left Two Harbors at 4:30 p.m. on 9 Nov and the two ships headed east 10 to 20 miles apart. VERIFIED

Two pictures of the track. The NTSB drew the probable tracklines on the left. The Coast Guard board said the times and positions reported from the *Anderson* "were not sufficiently accurate" to reconstruct either ship's track. That gap matters on page 8. CONFLICT

Where she lies. At 46°59.9'N, 85°6.6'W, the position Ontario law protects: about 17 statute miles (≈15 nautical miles) northwest of Whitefish Point, in 530 ft (≈160 m) of water. VERIFIED OUR CALCULATION

Found fast. On 14 Nov a US Navy aircraft with magnetic anomaly detection gear picked up a strong contact, with a slight oil slick. The cutter *Woodrush*'s side-scan sonar located the wreck within the first half day of its search. VERIFIED

TIMELINE · PART 1

9–10 NOVEMBER 1975

Radio wording is from sworn testimony as summarised by the Coast Guard Marine Board. No recording of the *Fitzgerald*'s side exists. Times EST.

SUNDAY 9 NOVEMBER

~8:30 A.M.–2:15 P.M.
Loads 26,116 long tons of taconite pellets at Burlington Northern Dock No. 1, Superior, Wisconsin. Crewmembers are seen replacing the hatch covers. VERIFIED

~2:15–2:30 P.M.
Departs for Detroit. VERIFIED

4:30 P.M.
The *Arthur M. Anderson* leaves Two Harbors, bound for Gary, Indiana. The two ships run 10 to 20 miles apart. VERIFIED

7:00 P.M.
Gale warnings for all of Lake Superior. VERIFIED

MONDAY 10 NOVEMBER

2:00 A.M.
Gale warnings raised to storm warnings. After a storm-warning call some time after 2 a.m., the captains agree to leave the normal lanes for the lee of the Canadian shore. VERIFIED

7:00 A.M.
The last weather report received from the *Fitzgerald*: 35-knot winds, 10-ft waves. VERIFIED

~1:40 P.M.
McSorley tells Cooper he will continue, although his ship is `"rolling some."` VERIFIED

AFTERNOON, OFF CARIBOU I.
Cooper later testified that he estimated the *Fitzgerald* passed closer to the six-fathom shoal north of Caribou Island than he wanted his own ship to be. VERIFIED

3:30–3:35 P.M.
The *Fitzgerald* reports `a fence rail down, two vents lost or damaged, and a list.` Cooper asks if he has his pumps going: `"Yes, both of them."` None of the *Anderson*'s officers who heard it felt it showed real concern. VERIFIED Reports of the call varied; the report's preface gives about 3:10. CONFLICT

~4:10 P.M.
The *Fitzgerald* says her `"radars weren't working"` and asks the *Anderson* to keep track of her. The Whitefish Point radio beacon and light are out after a power failure; the board found that did not contribute to the loss. VERIFIED

4:39 P.M.
Forecast: northwest winds 38 to 52 knots, gusts to 60; waves 8 to 16 ft. VERIFIED

4:52 P.M.
The *Anderson* logs 58-knot winds, the highest of her voyage, and seas of 12 to 18 ft. VERIFIED

~5:00–5:30 P.M.
On the radio to Cedric Woodard, a Great Lakes registered pilot aboard the Swedish ship *Avafors*, McSorley is heard telling someone on his own ship `"Don't allow nobody on deck."` He then reports a `"bad list,"` both radars lost, and heavy seas over the deck in one of the worst seas he had ever been in. VERIFIED

TIMELINE · PART 2

THE LAST CALL, AND AFTER

MONDAY 10 NOVEMBER, EVENING

~6:00 P.M.
South of Caribou Island the *Anderson* meets heavy seas, some as high as 25 ft. VERIFIED

SHORTLY BEFORE 7 P.M.
Cooper later said two huge seas passed his ship heading toward the *Fitzgerald*, and that he thought they were the two that sent her under. His later account; it is not in the Coast Guard findings, and sources give different times. ATTRIBUTED CONFLICT

~7:10 P.M.
The *Fitzgerald* asks about a ship ahead: "Well, am I going to clear?" She is told yes. Then the *Anderson*'s first mate, Morgan Clark: "Oh, by the way, how are you making out with your problems?" The reply: "We are holding our own." It was the last transmission ever heard from the *Fitzgerald*. VERIFIED

~7:10–7:20 P.M.
At about 7:10 the *Anderson*'s radar shows her 9 miles ahead, the last target anyone aboard was certain was the *Fitzgerald*. By 7:20 none of the targets is her. No distress call is ever received. VERIFIED

~8:25–8:32 P.M.
Cooper to the Coast Guard (logged 8:32 p.m., Channel 22): "I am very concerned with the welfare of the Steamer EDMUND FITZGERALD…" The board concluded the first notification came at about 8:25. VERIFIED CONFLICT

THAT NIGHT
The *Anderson* and the *William Clay Ford* go back out into the storm to search. The Coast Guard called their response "exemplary." VERIFIED Cooper on the Coast Guard tape: the sea out there is "tremendously large." ATTRIBUTED

THE SEARCH

THE DAYS AFTER
Searchers find lifeboats, life rafts and other debris. None of the 29 men was recovered. VERIFIED

14–16 NOV 1975
A Navy aircraft's magnetic detector finds a strong contact; the cutter *Woodrush*'s sonar shows two large objects on the bottom, each about 300 ft long. VERIFIED

20–28 MAY 1976
The Navy's unmanned CURV III makes 12 dives: 56 hours on the bottom, 43,255 ft of videotape, 895 colour photographs. The name is clearly visible on both the bow and the stern. VERIFIED

1976 → 1978
Canada re-surveys the shoals (page 8). The Coast Guard board dates its report 15 Apr 1977; the final report is dated 26 Jul 1977. NTSB report adopted 4 May 1978. VERIFIED

THE 29

The crew, as listed by the Coast Guard (surname and position). The youngest, watchman Karl Peckol, was 20. The families asked that the men be left in peace.

McSorley · master
McCarthy · first mate
Pratt · second mate
Armagost · third mate
Holl · chief engineer
Bindon · engineer
Edwards · engineer
Haskell · engineer
Champeau · engineer
Beetcher · porter
Church · porter
Bentsen · oiler
Walton · oiler
Wilhelm · oiler
Borgeson · maintenance
Mazes · maintenance
Cundy · watchman
Peckol · watchman
Spengler · watchman
O'Brien · wheelsman
Poviach · wheelsman
Simmons · wheelsman
Hudson · deckhand
Riippa · deckhand
Thomas · deckhand
Kalmon · second cook
MacLellan · wiper
Rafferty · steward
Weiss · cadet

THE THREE SUSPECTS

HATCHES, SHOAL, WAVES

The suspects are not rivals in every respect. Both official reports have boarding seas flooding the cargo hold. What they disagree about is how the water got in, and what happened at about 3:30 p.m. Here is who concluded what.

SUSPECT	WHAT THE OFFICIAL REPORTS CONCLUDED	WHO DISAGREES, AND WHY	BEST ANSWER
1. The hatches	**Coast Guard (1977):** "massive flooding of the cargo hold … through ineffective hatch closures as boarding seas rolled along the Spar Deck," beginning early on the 10th and never detected. **NTSB (1978):** "the collapse of one or more hatch covers," after earlier flooding through topside damage and leaky covers.	The two agencies differ on the mechanism: progressive flooding through ineffective closures (USCG) or sudden collapse (NTSB). The shipowners' trade group rejected the hatch finding. The Coast Guard found no negligence by anyone; the NTSB made no finding of fault.	The official "most probable" cause VERIFIED
2. The shoal	**Coast Guard:** the 3:30 damage most likely came from striking a floating object; a "light grounding or near grounding" on the Caribou shoals was "possible." **NTSB majority:** her trackline lay 2.5 miles east of the shoal's 10-fathom line.	**NTSB member Philip Hogue dissented:** a shoaling caused the list and topside damage, then 3 to 4 hours of undetected flooding. The Lake Carriers' Association, whose members owned and ran these ships, backed the shoal theory.	A minority view on the record CONFLICT
3. The waves	**NTSB:** the *Anderson* saw waves of 18 to 25 ft, above the predicted maximum; its forecasts were too low. **Coast Guard:** mariners were "adequately warned," and McSorley knew the storm's severity and location.	A 2006 NOAA/NWS re-run found waves around 25 ft at her place and time. "Three sisters" is sailors' lore, in neither report. A 2010 TV documentary argued for a rogue wave in a tank test; not peer-reviewed.	The agent in every version; not a separate verdict CONFLICT


WHERE THE TWO REPORTS SPLIT

- ☐ **The trackline.** The Coast Guard said the tracks could not be reconstructed. The NTSB built one, and used it to rule out the shoal. (Hogue made this point in his dissent.) CONFLICT
- ☐ **The weather.** The Coast Guard found the forecasts adequate; the NTSB found the wave forecasts too low. CONFLICT
- ☐ **The 1976 survey.** The two agencies read the same Canadian survey differently (page 8). CONFLICT
- ☐ **The clamps.** Undamaged hatch clamps on the wreck: the Coast Guard read them as never fully fastened; the industry and Hogue rejected that reading (page 7). CONFLICT


We grade the findings and the evidence, not the theories. No version is proven. Any page or video that says "hatches sank her", "she hit the shoal" or "a rogue wave sank her" as plain fact is going beyond the record.

SUSPECT 1

THE HATCHES

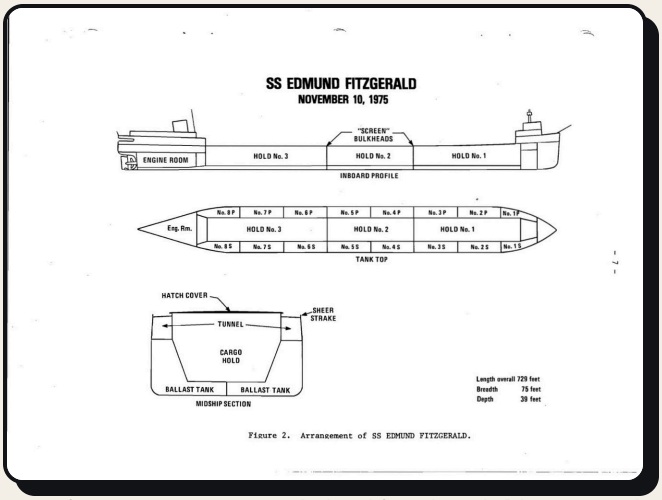

NTSB Figure 2: arrangement of the ship. Three holds separated by “screen” bulkheads; tank top; midship section. NTSB-MAR-78-3 (public domain).

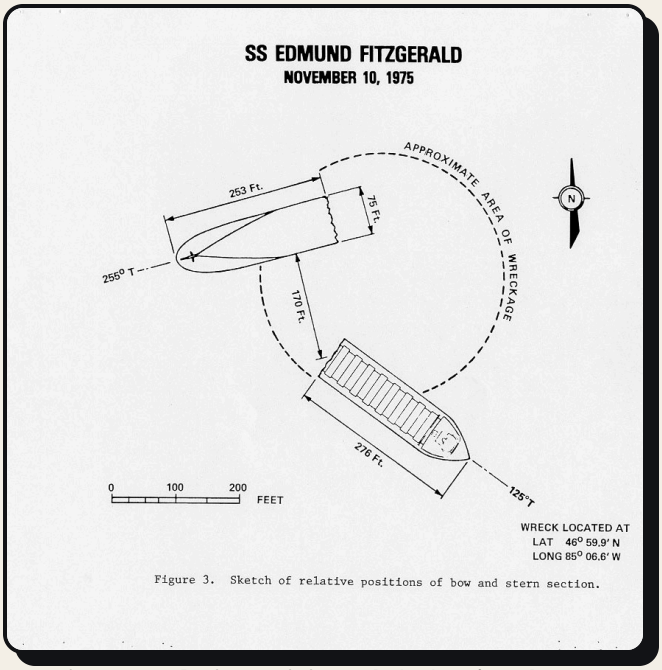

NTSB Figure 3: relative positions of the bow (276 ft, upright) and the stern (253 ft, upside down) on the bottom. NTSB-MAR-78-3 (public domain).

The design. 21 cargo hatches, each 11 by 48 ft, closed by a steel cover held down by 68 hand-set “Kestner clamps.” There was no company requirement for routine maintenance of the clamps or gaskets, and a hatch repair item was already on the winter lay-up list. VERIFIED

No way to see the water. The hold had no watertight bulkheads, only non-watertight “screen” bulkheads, and no sounding tubes or gauges. The Coast Guard concluded the flooding was never detected. VERIFIED

Lower in the water. Load-line changes in 1969, 1971 and 1973 let her load 3 ft 3¼ in deeper than when she was built. Both agencies list it as a contributing factor. VERIFIED

The clamps on the wreck. The 1976 CURV III survey found “the great majority” of the clamps it could see undamaged. The NTSB's survey findings: of 16 consecutive clamps at hatch No. 5, the first and eighth were distorted or broken and the 14 others were undamaged and open. Chairman King's concurring statement counts 18, with 16 undamaged. CONFLICT


Two readings. The Coast Guard: “too few of these and too many unfastened or loosely fastened clamps.” King: each of the 68 clamps must apply about 2,400 lb to make the cover weathertight; for a cover to seal by its own weight (about 14,000 lb), the NTSB calculated more than 178,000 lb would be needed. The shipowners and Hogue rejected any reading that blamed the crew. CONFLICT

Not just this ship. Inspectors who rode Great Lakes ships from the fall of 1976 found others that also could not keep their hatches weathertight. VERIFIED

The wreck, in the reports' words. About 200 ft of the middle of the ship is missing, “an area of distorted metal” between the two pieces; the fractures show “curving, twisted edges such as is associated with ductile failure.” A break-up on the surface was judged less likely because the two halves lie within a ship length of each other. VERIFIED **And a song.** In 2010 Gordon Lightfoot changed one line in his live performances so it no longer suggested the crew was at fault for a hatch failure; the recording was left as it was. VERIFIED

SUSPECT 2 · THE 1976 SURVEY

THE SHOAL

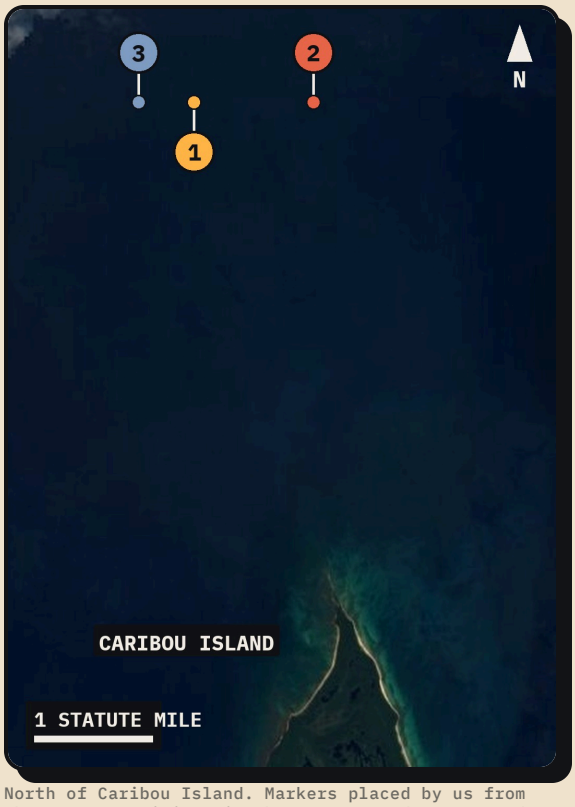

North of Caribou Island. Markers placed by us from the survey positions in the Coast Guard report and the NTSB. Imagery: Sentinel-2 cloudless 2016 by EOX (CC BY 4.0, s2maps.eu); the shoal itself is under water.

#	SPOT (1976 DEPTH)
1	Canadian chart 2310's own 6-fathom spot: 9.5 m (5.2 fathoms, ≈31 ft)
2	New: slightly more than a mile due east of 1: 9.7 m (5.3 fathoms, ≈32 ft)
3	The "6-fathom spot" as plotted on US Lake Survey Chart 9: 52 m (28.4 fathoms), per the NTSB

Old charts. The charts for these waters were based on Canadian soundings from 1916 and 1919. The *Fitzgerald* carried no depth finder; she was not required to. VERIFIED

The re-survey. The Coast Guard board asked Canada to re-survey the waters between Michipicoten and Caribou islands. The Canadian Hydrographic Service ship CSS *Bayfield* worked from 19 May to 8 July and 7 August to 30 September 1976. The final field report reached the board on 25 March 1977 and delayed its report. VERIFIED

Reading 1, the Coast Guard board: the northern end of the shoals north of Caribou Island extends "approximately one mile further east than indicated on Canadian chart 2310." **Reading 2, the NTSB:** "No soundings less than 10 fathoms were indicated either north or east of the charted 10-fathom curve." Both can be true: the shallowest ground reaches about a mile east, but stays inside the charted 10-fathom line. CONFLICT


The twist. Cooper's call to his company, quoted in Hogue's dissent: "I AM POSITIVE HE WENT OVER THAT SIX (6) FATHOM BANK!" But at the US chart's plotted "6-fathom spot", the NTSB says the Canadian survey found 52 m of water; King called it a spot "determined by hydrographic survey not to exist." The real shallows lie about 0.4 nautical miles east of it. Under oath, with charts, Cooper drew a track that matched the NTSB's, according to King. VERIFIED 0.4 NMI: OUR CALCULATION

The margin. She left Superior drawing 27 ft 2 in forward and 27 ft 6 in aft. Over the 9.5–9.7 m spots that leaves roughly 4 ft in calm water, before wave troughs; depths are to chart datum, so the real margin depended on the day's lake level: a few feet. OUR CALCULATION

The NTSB's test. To reach the closest point where grounding could occur, 3.3 miles from her 3:20 radar position, by 3:30 she would have needed 19.8 mph. Her full speed was 16.3 mph. VERIFIED The Coast Guard and the NTSB both asked for the charts to be corrected. VERIFIED

SUSPECT 3

THE WAVES

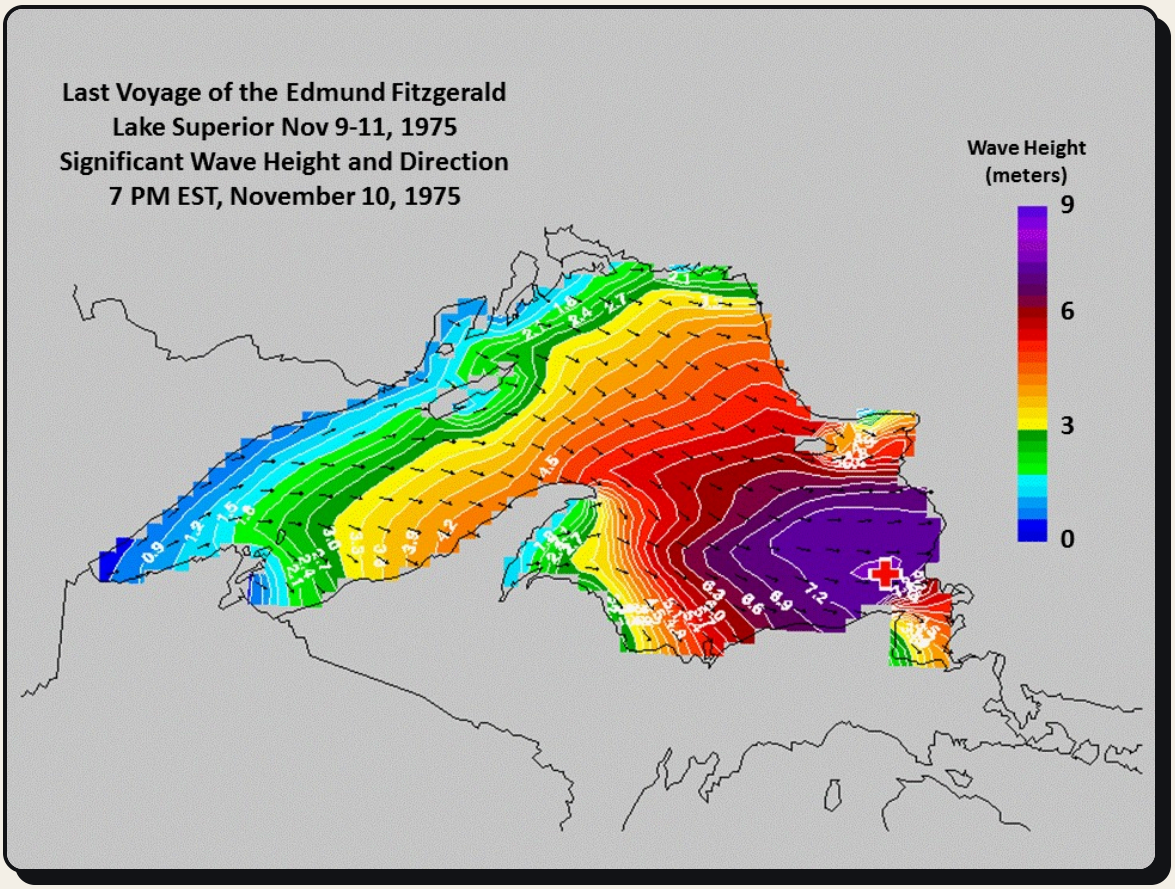

National Weather Service, Marquette, Michigan: modelled significant wave height and direction at 7 p.m. EST, 10 November 1975 (public domain). The *Fitzgerald* sank in the east of the lake, where the colours run highest.

What the ships saw. The *Anderson* logged 58-knot winds at 4:52 p.m. and met seas as high as 25 ft around 6 p.m. VERIFIED Cooper testified to gusts of 70 or 75 knots. ATTRIBUTED

The forecasts. The 4:39 p.m. forecast said waves of 8 to 16 ft. The NTSB found the *Anderson*'s 18–25 ft waves were "12 to 75 percent greater" than the predicted maximum (the NTSB's figure). The Coast Guard board found mariners "adequately warned." CONFLICT

No finding against the captain. The Coast Guard found McSorley knew how severe the storm was and where it was; he and Cooper took the northern route for shelter. Neither report blamed him. VERIFIED

The 2006 re-run. NOAA and NWS scientists (Hultquist, Dutter and Schwab) re-ran the storm with modern models: waves around 25 ft at her place and time. VERIFIED A 2005 student-newspaper account (*The Daily Cardinal*) adds that six hours earlier or later she might have missed the worst. ATTRIBUTED

A 46-ft wave? Theoretically possible in those seas, the scientists said, but "rare and unlikely." No model proves a giant wave hit her at the exact moment. VERIFIED

Lore and TV. "Three sisters" is Lakes sailors' name for a set of three oversized waves; it is in neither report. VERIFIED A 2010 Canadian TV documentary, *Dive Detectives*, tested the storm in a wave tank in St. John's and argued for a rogue wave. A TV test, not peer-reviewed. VERIFIED

MONEY AND LAW

WHO OWNED HER, WHO'S PROTECTED

THE MONEY

An insurance company's ship. Northwestern Mutual built her as an investment, paying Great Lakes Engineering Works $8.4 million, and named her after its president and chairman, Edmund Fitzgerald. Oglebay Norton's Columbia Transportation Division ran her under charter. VERIFIED

The suits. About a week after the sinking, two widows sued the owner and the operator for $1.5 million; a second suit sought $2.1 million, according to the Archiving Wheeling history blog and a 1977 book. ATTRIBUTED Oglebay Norton asked a US federal court to cap its liability for suits by crew families at $817,920. ATTRIBUTED

THE CAP, CHECKED

$60 × 13,632 tons = $817,920

$60 per gross ton, a formula in a federal law dating to 1851 (as amended), times her 13,632 gross tons. It matches exactly.
OUR CALCULATION

How it ended. Families settled privately, under confidentiality agreements, according to books on the wreck (Hemming 1981; Ramsay 2009). ATTRIBUTED One researcher, Thomas Nelson, found settlements from about $25,000 to almost half a million dollars. ATTRIBUTED How the court cases formally ended is not in any record we could reach.

No negligence. The Coast Guard board found no actionable misconduct or negligence by anyone. VERIFIED This page sets out the money trail; it is not legal or financial advice.

THE LAW

A protected site. Ontario lists the wreck as a marine archaeological site (O. Reg. 11/06 under the Ontario Heritage Act, in force 25 January 2006), defined at 85°6.6'W, 46°59.9'N. VERIFIED

500 metres. Within a 500 m radius it is illegal, without a provincial licence, to dive, or to operate a submersible, ROV or autonomous underwater vehicle, or survey gear such as side-scan sonar or a camera. It does not stop ships passing, and it stops at Ontario's border. VERIFIED

THE PENALTY

Fines up to CA$1,000,000

Ontario Heritage Act s. 69(3). A maximum, not a set fine.
VERIFIED

No dives since 1995. Canada has not approved another expedition since the bell recovery, according to FOX 9. ATTRIBUTED When the protection came in, deckhand Bruce Hudson's mother, Ruth Hudson, told *The Blade*: “It's protected now.” VERIFIED

The bell. At the families' request, the 200-lb bronze bell was raised on 4 July 1995; a replica engraved with the 29 names was left on the wreck. Each 10 November at Whitefish Point it rings once for each man, and a 30th time for all sailors lost on the Great Lakes. VERIFIED

SOURCES

CHECK OUR WORK

The two official reports come first; both are US government works in the public domain, and every radio quote in this file is from them, except Cooper's "tremendously large", which is from the museum's transcript of the Coast Guard tape (source 6). Then Ontario law, the 2006 storm study, the museum, and named news reports. Quoted words from other sources are short extracts for reference and comment, attributed. Facts checked to 25 Oct 2026; anything that can change is dated.

1. **U.S. Coast Guard, Marine Casualty Report: SS Edmund Fitzgerald; Sinking in Lake Superior on 10 November 1975 with Loss of Life. Marine Board of Investigation report (15 Apr 1977) and Commandant's Action, USCG 16732/64216 (dated 26 Jul 1977). Transcription by USGenNet; scan via DTIC ADA049806.** https://us-data.org/mi/glm/report/uscg/edmund-fitzgerald-1977/uscg-rep-edmundfitzgerald-1977.html · https://archive.org/details/DTIC_ADA049806
2. **National Transportation Safety Board, Marine Accident Report NTSB-MAR-78-3, SS Edmund Fitzgerald Sinking in Lake Superior on November 10, 1975 (adopted 4 May 1978), with the King concurrence and the Hogue dissent; Figures 1, 2 and 3.** https://www.ntsb.gov/investigations/AccidentReports/Reports/MAR7803.pdf
3. **Ontario Regulation 11/06, Marine Archaeological Sites (Ontario Heritage Act).** https://www.ontario.ca/laws/regulation/060011
4. **Ontario Heritage Act, R.S.O. 1990, c. O.18, ss. 48 and 69.** https://www.ontario.ca/laws/statute/90o18
5. **Hultquist, Dutter & Schwab, "Reexamination of the 9–10 November 1975 'Edmund Fitzgerald' Storm Using Today's Technology", Bull. Amer. Meteor. Soc. 87(5), May 2006. doi:10.1175/BAMS-87-5-607.** https://doi.org/10.1175/BAMS-87-5-607
6. **Great Lakes Shipwreck Historical Society: "Edmund Fitzgerald"; "The Fateful Journey" (incl. the Coast Guard search-tape transcript and Cooper interview); 2026 memorial notice.** https://shipwreckmuseum.com/edmund-fitzgerald/ · https://shipwreckmuseum.com/index.php/the-fateful-journey/
7. **Associated Press (Scott Bauer), 50th-anniversary feature, 1 Nov 2025, via WSLS.** wsls.com/news/national (1 Nov 2025)
8. **WLUC / Upper Michigan's Source, 50th anniversary bell ceremony, 10 Nov 2025.** https://www.uppermichiganssource.com/2025/11/11/50th-anniversary-bell-ceremony-held-edmund-fitzgerald
9. **Detroit Free Press (Keith Matheny), "Why did the Edmund Fitzgerald sink? 3 theories could explain it", Nov 2025.** https://www.yahoo.com/news/articles/caused-edmund-fitzgerald-sink-50-110151228.html
10. **FOX 9 (Joe Augustine), "The Edmund Fitzgerald hasn't been explored in 30 years", 2 Nov 2025.** https://fox9.com/news/edmund-fitzgerald-hasnt-been-explored-30-years-will-ever-be-another-dive
11. **Milwaukee Magazine (John U. Bacon), the Milwaukee connection, 6 Nov 2025.** https://www.milwaukeemag.com/edmund-fitzgeralds-dream-the-milwaukee-connection-to-the-great-lakes-most-legendary-shipwreck/
12. **The Blade (Erica Blake), "Edmund Fitzgerald wreck site gets added protection", 8 Feb 2006 (archived).** https://web.archive.org/web/20060224005347/http://toledoblade.com/apps/pbcs.dll/article?AID=%2F20060208%2FNEWS19%2F602080406%2F-1%2FNEWS
13. **The Canadian Press via CTV News, the Dive Detectives documentary, 25 Mar 2010 (archived); AnnArbor.com and ABC7 Chicago on Lightfoot's revised line.** https://web.archive.org/web/20151111120502/http://www.ctvnews.ca/edmund-fitzgerald-sunk-by-rogue-wave-documentary-1.495742
14. **LiveScience, "New Clues to the Wreck of the Edmund Fitzgerald", 19 May 2006; The Daily Cardinal, 12 Dec 2005; UW–Madison News, Nov 2010 (the 2006 storm study).** https://www.livescience.com/10453-clues-wreck-edmund-fitzgerald.html · https://news.wisc.edu/on-anniversary-of-edmund-fitzgerald-sinking-wave-research-may-prevent-future-tragedies/
15. **Archiving Wheeling (Christina Fisanick), the lawsuits and the $60-per-ton formula, 4 May 2023.** https://www.archivingwheeling.org/blog/the-wheeling-connection-to-gordon-lightfoot-his-ballad
16. **Great Lakes Now (Thomas Nelson), the families' settlements, 2025 (search excerpts only).** https://www.greatlakesnow.org/?p=44293
17. **S.S. Edmund Fitzgerald Online, crew list (ages).** https://www.ssefo.com/crew/index.html
18. **Images: 1971 photo by Greenmars (CC BY-SA 3.0); NWS Marquette wave graphic and USACE photo of the ship (public domain), all via Wikimedia Commons. Maps: NASA Blue Marble via NASA GIBS (public domain); Natural Earth; Sentinel-2 cloudless 2016 by EOX (CC BY 4.0).** https://commons.wikimedia.org/wiki/File:Edmund_Fitzgerald,_1971,_3_of_4_(restored).jpg · https://commons.wikimedia.org/wiki/File:Waves_sinking_of_SS_Edmund_Fitzgerald.gif · https://s2maps.eu

How this file was made. A fact desk read both reports and the statute, graded 161 claims, and kept a do-not-say list: no "crew error", no "the fine is $1 million", no "three sisters sank her", no song lyrics. A second checker re-verified the load-bearing claims. Spotted an error? Reply to the email this file came with, or write to hello@vibewithjudeo.com, and we'll correct it and credit you.

Independence and respect. Vibe with Judeo is an independent documentary channel, not affiliated with the US Coast Guard, the NTSB, the Government of Ontario, the Great Lakes Shipwreck Historical Society or any family. 29 men died. None was ever recovered, and the families have asked that the wreck and the men be left in peace; this file respects that.

THAT WAS THE FREE EDITION

MORE CASE FILES

One case file for each new Vibe with Judeo documentary: the timeline, the map, the evidence and every source, graded so you can check our work.

WATCH THE STORY

- [ ] The film (premieres Sun 8 Nov 2026): **youtu.be/ceOMnPXTL8g**
- [ ] The 2026 memorial: the museum's livestream, Tue 10 Nov 2026, 7 p.m. EST; the museum buildings are closed that day.

KEEP READING

- [ ] Every free case file: **vibewithjudeo.com/case-files**
- [ ] Share this one: **vibewithjudeo.kit.com/edmund-fitzgerald**

An open case. According to FOX 9, Canada has approved no dive since 1995, and no new survey has been made. If that changes, we'll re-issue this file with a new date.

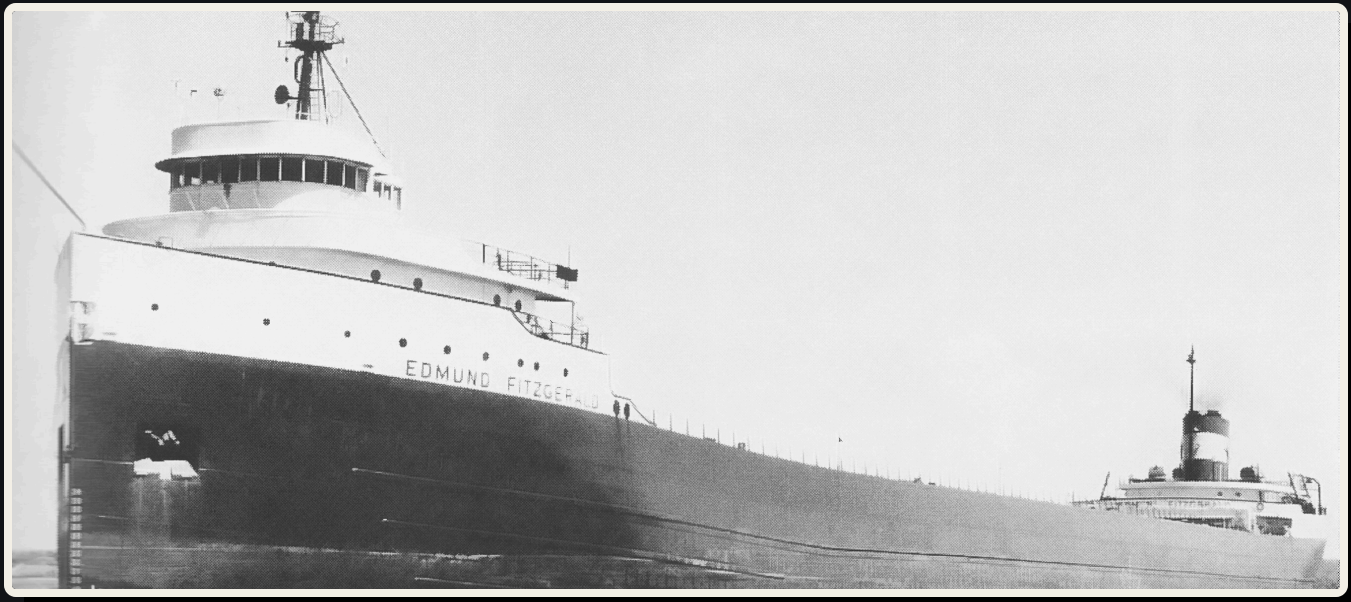


Photo: the *Edmund Fitzgerald*, photograph attributed to the U.S. Army Corps of Engineers (public domain, via Wikimedia Commons). Vibe with Judeo (Jude Akpan), 4840 Testly Road, Richmond, BC V3M 2G1, Canada. How we handle your email address: privacy.vibewithjudeo.com. Unsubscribe from any of our emails in one click.